

Ranges of alpha particles in various media

B.J. Brennan † and R.G. Lyons §

Departments of †Physics and §Geography, University of Auckland, New Zealand

It is now well established that the TL or ESR signal induced by an alpha particle is very nearly proportional to its range (Aitken and Bowman, 1975; Lyons, 1988; Lyons and Brennan, 1989a, 1989b). Knowledge of the variation of alpha particle range with energy is thus important to the estimation of the alpha particle contribution to the environmental dose rate for samples used in ESR and TL dating. Zimmerman (1971) used data on ranges in aluminium from Marion and Young (1968) to infer ranges in ceramics, while interpolations between neon and sodium in the tabulations of Northcliffe and Schilling (1970) and Williamson et al. (1966) were used by Aitken and Bowman (1975) to estimate ranges in pottery. A later tabulation by Zeigler (1977) has been employed by Lyons and Brennan (1989a, 1989b) to estimate ranges in calcite, and by Valladas (1988) to tabulate stopping powers and ranges in silica.

A more recent volume by Zeigler et al. (1985) provides a data set which is a development of the work of Zeigler (1977) and companion volumes relating to heavy ions other than alpha particles. Because the 1985 volume employs a more complete and recent set of experimental data together with improvements in the calculation techniques employed, the results are more reliable than the 1977 volume and earlier tabulations referred to above. Zeigler and his co-workers make available computer software for the calculation of ranges and stopping powers and Monte-Carlo simulation of target penetration by heavy ions. The software is updated continuously and the most recent (1988) version is written in TURBO-BASIC for an IBM-PC or compatible computer.

In this paper we present the results of calculations employing the software provided by Zeigler and his co-workers. We used the implementation of the PRAL transport equation to calculate average projected ranges (that is, distance traveled in the original direction of motion) for alpha particles in the various media. While it might be argued that the total path length is the fundamental determinant of ionization damage and thus ESR or TL signal for an alpha particle, the difference between total and projected path length is less than 1% for energies of 1 MeV or greater; and in addition the projected path length is fundamental to estimation of dose due to sources external to a sample. In Zeigler's 1988 computer program, the stopping power of the target is calculated as the appropriately weighted sum of the stopping

powers of the constituent elements, and bonding corrections can be made for some bonds involving light elements. Nuclear as well as electronic stopping effects are included. The stopping powers for carbon and oxygen in solids have been used. Base data for stopping powers is in units of eV/(1×10^{15} molecules cm^{-2}), but range data is presented here in mg cm^{-2} for ease of comparison.

The compositions used for the various materials are given in table 1. As Zeigler's software accepts no more than 6 elements, it was sometimes necessary to combine some of the lower concentration elements with others of similar atomic number e.g. aluminium and magnesium, potassium and calcium. Note that most materials which are commonly used in ESR or TL dating have similar effective atomic masses (A_{av}) and charges (Z_{av}) with the result that their ranges are very similar if measured in mg cm^{-2} (fig. 1). The most notable exception is bone, which has a much lower effective atomic mass and charge due to the high proportion of hydrogen and carbon, and hence shorter ranges. Silica and dry pottery represent the extremes for the remaining dating materials, with the majority lying closer to silica than to pottery.

While the difference between some materials may not be significant in a particular application, all the data sets are included in table 2 for completeness as they represent the most up-to-date information available; it is left to the user to assess the degree of accuracy required. For simplicity of presentation the corresponding stopping powers are not tabulated here; they may be derived from Zeigler's software or from the equations in table 3. Alternatively, we would be pleased to supply them and/or more details of range data on request.

From the values given in table 2 the ranges for other energies may be readily obtained by interpolation using, for example, a cubic spline. Alternatively, ranges for each compound may be generated using the cubic polynomials for range as a function of energy given in table 3. These polynomials were obtained by a least squares fit to 80 range data points which were approximately logarithmically distributed between 10 keV and 10 MeV, and are accurate to within 0.01 mg cm^{-2} for ranges up to 10 MeV. The differential with respect to energy (dR/dE) gives quadratics from which ranges and stopping powers (dE/dR) may be

Table 1. Ranges in mg cm^{-2} for alpha particles of different energies (MeV) for dating materials:

a) simple

| Energy | CaCO ₃ | SiO ₂ | Albite | Orthoclase | Anorthite | Al |
|--------|-------------------|------------------|--------|------------|-----------|-------|
| 0.01 | 0.026 | 0.027 | 0.027 | 0.027 | 0.027 | 0.027 |
| 0.05 | 0.096 | 0.098 | 0.098 | 0.100 | 0.100 | 0.101 |
| 0.10 | 0.155 | 0.156 | 0.155 | 0.160 | 0.159 | 0.160 |
| 0.15 | 0.203 | 0.201 | 0.200 | 0.206 | 0.206 | 0.209 |
| 0.2 | 0.245 | 0.241 | 0.240 | 0.247 | 0.248 | 0.254 |
| 0.3 | 0.322 | 0.311 | 0.311 | 0.319 | 0.323 | 0.337 |
| 0.4 | 0.391 | 0.374 | 0.376 | 0.385 | 0.392 | 0.418 |
| 0.6 | 0.519 | 0.495 | 0.500 | 0.511 | 0.522 | 0.576 |
| 0.8 | 0.644 | 0.615 | 0.623 | 0.635 | 0.651 | 0.737 |
| 1 | 0.769 | 0.739 | 0.750 | 0.764 | 0.782 | 0.901 |
| 2 | 1.50 | 1.47 | 1.49 | 1.52 | 1.55 | 1.82 |
| 3 | 2.44 | 2.42 | 2.45 | 2.49 | 2.52 | 2.94 |
| 4 | 3.59 | 3.58 | 3.60 | 3.67 | 3.71 | 4.27 |
| 5 | 4.94 | 4.93 | 4.96 | 5.05 | 5.10 | 5.80 |
| 6 | 6.48 | 6.47 | 6.49 | 6.62 | 6.67 | 7.53 |
| 7 | 8.19 | 8.19 | 8.21 | 8.38 | 8.42 | 9.46 |
| 8 | 10.07 | 10.07 | 10.09 | 10.31 | 10.35 | 11.58 |
| 9 | 12.12 | 12.13 | 12.15 | 12.41 | 12.45 | 13.88 |
| 10 | 14.33 | 14.35 | 14.38 | 14.68 | 14.72 | 16.38 |

b) complex

| Energy | Bone | Plagioclase | Pottery (sat) | Basalt | Pottery |
|--------|-------|-------------|---------------|--------|---------|
| 0.01 | 0.021 | 0.027 | 0.027 | 0.027 | 0.027 |
| 0.05 | 0.074 | 0.099 | 0.099 | 0.101 | 0.101 |
| 0.1 | 0.118 | 0.157 | 0.156 | 0.161 | 0.161 |
| 0.15 | 0.154 | 0.203 | 0.202 | 0.208 | 0.208 |
| 0.2 | 0.186 | 0.244 | 0.242 | 0.251 | 0.250 |
| 0.3 | 0.242 | 0.317 | 0.313 | 0.326 | 0.324 |
| 0.4 | 0.293 | 0.384 | 0.378 | 0.395 | 0.391 |
| 0.6 | 0.387 | 0.511 | 0.501 | 0.525 | 0.520 |
| 0.8 | 0.479 | 0.637 | 0.624 | 0.653 | 0.648 |
| 1 | 0.575 | 0.766 | 0.751 | 0.785 | 0.782 |
| 2 | 1.15 | 1.52 | 1.5 | 1.56 | 1.56 |
| 3 | 1.92 | 2.48 | 2.47 | 2.55 | 2.57 |
| 4 | 2.87 | 3.66 | 3.64 | 3.75 | 3.78 |
| 5 | 4.00 | 5.03 | 5.01 | 5.15 | 5.2 |
| 6 | 5.28 | 6.58 | 6.57 | 6.75 | 6.8 |
| 7 | 6.72 | 8.32 | 8.31 | 8.53 | 8.6 |
| 8 | 8.3 | 10.22 | 10.23 | 10.48 | 10.57 |
| 9 | 10.04 | 12.3 | 12.31 | 12.61 | 12.72 |
| 10 | 11.92 | 14.55 | 14.57 | 14.91 | 15.05 |

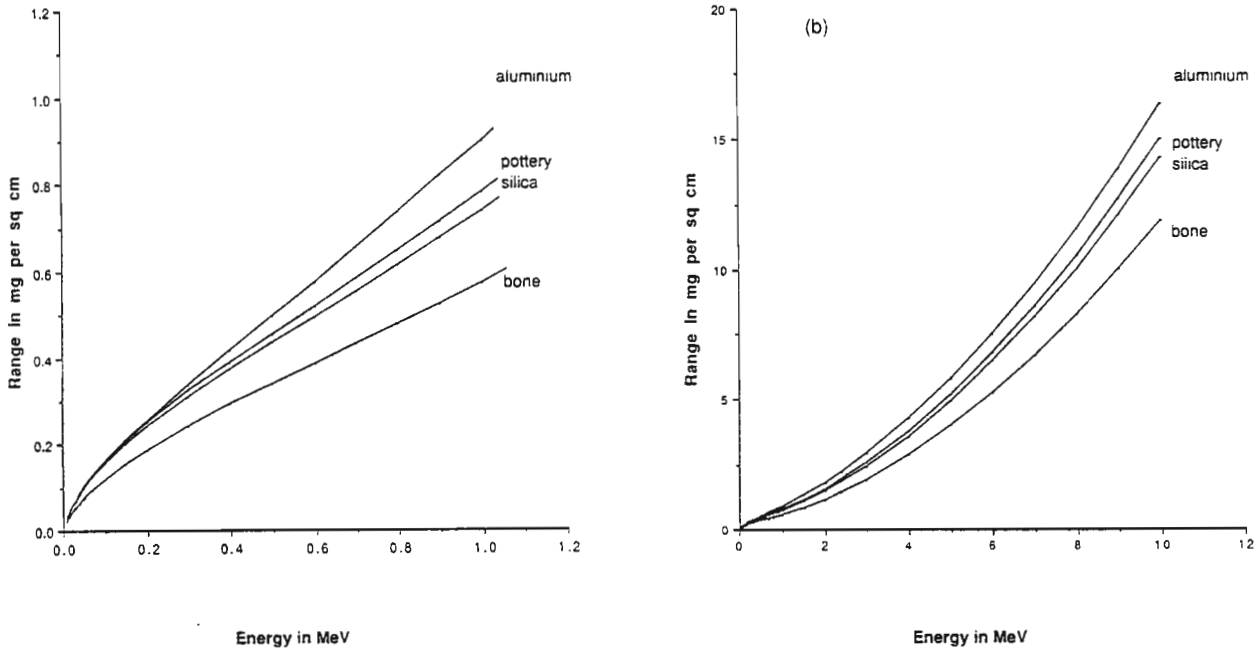


Figure 1.

Range as a function of energy for typical dating materials a) 0-1 MeV b) 0-10 MeV. Silica and dry pottery represent the extremes for most dating materials, except bone, with the majority lying closer to silica than pottery.

Table 2. Compositions, average atomic weights (A_{av}) and atomic numbers (Z_{av}) of dating materials used in calculating ranges. Note that, as the composition for pottery is highly variable, the values given for pottery are approximate only. Specific values, where required, must be derived from the actual composition of the sample. Compositions are in % by weight.

$$A_{av} = \left(\frac{\sum n_i A_i}{\sum n_i A_i^{0.5}} \right)^2$$

$$Z_{av} = \left(\frac{\sum n_i Z_i}{\sum n_i Z_i^{0.5}} \right)^2$$

where n_i is the atomic abundance of the i th element.

| Material | A_{av} | Z_{av} | Composition (% by weight) |
|-------------------|----------|----------|---|
| Albite | 20.1 | 10.2 | NaAlSi ₃ O ₈ |
| Aluminium | 27.0 | 13.0 | Al |
| Anorthite | 22.0 | 10.9 | CaAl ₂ Si ₂ O ₈ |
| Basalt | 22.8 | 11.3 | SiO ₂ (45), Al ₂ O ₃ (14), FeO (10), Fe ₂ O ₃ (3), MgO (11), CaO (10), Na ₂ O (3), TiO ₂ (2), K ₂ O (1) |
| Bone | 11.8 | 5.6 | H (7), C (30), O (44), P (4), Ca (15) |
| Calcium carbonate | 21.1 | 10.5 | CaCO ₃ |
| Orthoclase | 22.0 | 10.2 | KAlSi ₃ O ₈ |
| Plagioclase | 21.2 | 10.5 | 50% albite/50% anorthite |
| Pottery (dry) | 23.1 | 11.3 | SiO ₂ (70), Al ₂ O ₃ (15), Fe ₂ O ₃ (5), K ₂ O (3), CaO (2), MgO (2), NaO (1), TiO ₂ (1) |
| Pottery (sat.) | 21.0 | 10.2 | as above (93), H ₂ O(7) ie 15% porosity |
| Silica | 20.4 | 10.2 | SiO ₂ |

Table 3. Coefficients for polynomial approximations for deriving ranges in $\text{mg}\cdot\text{cm}^{-2}$ for alpha particles of different energies (MeV),
 $R = A_3E^3 + A_2E^2 + A_1E + A_0$

Note that the constant term is negligible in the low energy polynomials as $R = 0$ for $E = 0$.
 The corresponding equations for stopping powers may be calculated as the reciprocal of dR/dE .

| Material | 0 - 1 MeV | | | 1 - 10 MeV | | | |
|---------------|-----------|-------|-------|------------------|--------|-------|-------|
| | A_3 | A_2 | A_1 | $A_3 \cdot 10^3$ | A_2 | A_1 | A_0 |
| Albite | 0.73 | -1.28 | 1.29 | -1.14 | 0.1107 | 0.422 | 0.22 |
| Anorthite | 0.72 | -1.29 | 1.33 | -1.26 | 0.1143 | 0.431 | 0.24 |
| Basalt | 0.75 | -1.33 | 1.36 | -1.37 | 0.1174 | 0.430 | 0.24 |
| Bone | 0.55 | -1.00 | 1.01 | -1.26 | 0.1012 | 0.286 | 0.19 |
| Calc carb. | 0.68 | -1.26 | 1.33 | -1.45 | 0.1160 | 0.391 | 0.26 |
| Orthoclase | 0.77 | -1.36 | 1.34 | -1.31 | 0.1158 | 0.416 | 0.23 |
| Plagioclase | 0.72 | -1.29 | 1.31 | -1.26 | 0.1135 | 0.423 | 0.23 |
| Pottery | 0.78 | -1.37 | 1.35 | -1.18 | 0.1152 | 0.448 | 0.22 |
| Pottery (sat) | 0.76 | -1.33 | 1.31 | -1.25 | 0.1140 | 0.420 | 0.22 |
| Silica | 0.76 | -1.34 | 1.31 | -1.36 | 0.1146 | 0.402 | 0.22 |

calculated. Valladas (1988) quotes linear expressions for dR/dE analogous to the expression $1+0.29E$ used by Zimmerman (1971). We note, however, that Zimmerman in fact assumed that dR/dE was proportional to $(1 + 0.29E)$, and, in the absence of the appropriate proportionality constants, the expressions quoted by Valladas do not provide useful estimates for dR/dE .

For silica, the ranges calculated using the 1988 implementation of Zeigler are 10 - 5 % percent smaller (for alpha energies from 3 - 10 MeV) than the ranges based on the data of Zeigler (1977), presented in Valladas (1988). In absolute terms the differences increase from 0.1 mg cm^{-2} , for 50 keV alphas through 0.31 mg cm^{-2} for 4 MeV alphas to 0.66 mg cm^{-2} for 10 MeV alphas. Differences are due largely to the updated data set and calculation method but the use of projected range instead of total range also makes a small contribution, reducing the ranges calculated by approximately 0.05 mg cm^{-2} (<1% for all alphas above 4 MeV).

Because the composition of pottery is highly variable, the difference between compositions used in range calculations may outweigh the effect of using different calculation methods. For example, the composition we used for dry pottery, which lay between the extremes we found in a brief literature search, gave us an A_{av} and Z_{av} of 23.1 and 11.3 (cf values of 21.4 and 10.6, respectively, in Bowman, 1982). Our higher values for A_{av} and Z_{av} were sufficient to offset the difference in calculation methods and coincidentally yielded very similar ranges to those cited in Aitken and Bowman (1985).

We have compared the different calculation methods, including one given in Benton and Henke (1969), by applying them to calcium carbonate (fig. 2). Note that the ranges derived by other methods are not simply

proportional to the Zeigler (1988) ranges. The discrepancies are not large at the energies found in the natural environment, being generally less than 8%. At the energies below 1 MeV the differences are much more striking and may be important in estimating alpha doses due to external sources. It may reasonably be inferred that similar variations would also result from the application of the different methods to other materials.

Total ranges per parent disintegration for the uranium and thorium series, assuming equilibrium, in the various materials are given in table 4. Energies and branching ratios are taken from Nambi and Aitken (1986). The branching ratios in the Th-232 and U-235 chains have been applied to the ranges of the contributing alpha particles, not to the energies, as it is the average tracklength that is required, not the tracklength corresponding to the average energy. The difference in the two methods is small; averaging energies gives an underestimate of 1.5% for the branch in the Th-232 chain i.e. only 0.4% in the total Th-232 chain in equilibrium.

If dose rates are being calculated from range data, as in Aitken (1985), p287, the relevant data on total ranges from table 4 may be used to derive the average alpha ranges for lines 12 and 13 in Aitken's table G.4, for the specific material. The figures in lines 16-19 are then proportional to the appropriate alpha range.

The adjustments to natural dose rates implied by these revised estimates will generally be smaller than the uncertainty in the overall dating technique. Nevertheless, it is desirable to avoid systematic errors wherever possible by taking advantage of the most recent data and techniques.

References

- Aitken, M.J., and Bowman, S.G.E. (1975) Thermoluminescence dating: assessment of alpha particle contribution *Archaeometry*, **17**, 132-138.
- Benton, E.V., and Henke D.J. (1969) Heavy particle range-energy relations for dielectric nuclear track detectors *Nuclear instruments and methods* **67**, 87-92.
- Bowman, S.G.E. (1982) Alpha particle range in pottery *PACT J.*, **6**, 61-66.
- Lyons, R.G. (1988) Determination of alpha effectiveness in ESR dating using linear accelerator techniques: methods and energy dependence *Nuclear Tracks* **14** (1-2), 275-288.
- Lyons, R.G., and Brennan, B.J. (1989) Values of η and k_{eff}/k_{ref} for alpha dose rate calculations in speleothem calcite *Ancient TL*, **7**(1), 1-4.
- Lyons, R.G., and Brennan, B.J. (1989) Alpha effectiveness in ESR dating: energy dependence and implications for dose rate calculations *Int. Journ. Applied Radiation and Isotopes* (in press)
- Marion, J.B., and Young, F.C. (1968) *Nuclear reactions analysis*. North Holland, Amsterdam.
- Nambi, K.S.V., and Aitken, M.J. (1986) Annual dose conversion factors for TL and ESR dating *Archaeometry*, **28**(2), 202-205.
- Northcliffe, L.C., and Schilling, R.E. (1970) Range and stopping power for heavy ions. *Nuclear Data Tables A7*, 233- 463.
- Valladas, G. (1988) Stopping power and range for alpha particles in SiO₂ *Ancient TL*, **6**, 1, 7-8.
- Williamson, C.F., Boujod, J.P. and Picard, J. (1966) Tables of range and stopping power of chemical elements for charged particles of energy 0.05 to 500 MeV. Rapport CEA-R3042. Centre d'Etudes Nucleaires de Saclay.
- Zimmerman, D.W. (1971) Thermoluminescent dating using fine-grains from pottery. *Archaeometry*, **13**, 29-52.
- Zeigler, J.F. (1977) *Helium, stopping powers and ranges in all elemental matter*. Pergamon Press, Oxford.
- Zeigler, J.F., Biersack, J.P., and Littmark, U. (1985) *The stopping and range of ions in solids* Vol 1 (ed Zeigler) Pergamon Press, New York.

Acknowledgements

We wish to thank J.F. Zeigler and his co-workers for making the software available and M.J. Aitken for encouragement and helpful suggestions. RGL is grateful for the support of the Geological Survey, Department of Scientific and Industrial Research, a Postgraduate Scholarship from the University Grants Committee and a Fellowship of the Auckland Federation of University Women.

PR Reviewer's comments (Martin Aitken)

It is good to see these definitive data on alpha ranges as well as on A_{av} and Z_{av} values; the latter will be useful in other contexts too. As the authors comment there is unlikely to be any significant shift in ages but it's reassuring to be on firmer ground.